

## F71RE170HOPR830NG



## FIL 70 PRISM REC 6600 WW GR.

## Description:

\*\*\*\*\*"Recessed luminaire model FIL 70 PRISM REC 6600 WW GR., LAMP brand. Made of satin grey painted extruded aluminium with prismatic polycarbonate diffuser. Model for MID-POWER LED, with warm white colour temperature and control gear included. Glare rating < 19 (for 4h, 8h 70/50/20). IP43, IK06 protection rating. Insulation class I. Photobiological safety group 0. \*\*\*\*\* Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015." " "


Finish: Gloss grey

Dimensions: 1.743 x 70 x 70 mm

Weight: 4.426 g

Installation: Recessed


Recessing measures: 1,755 x 78 x 85 mm



## TECHNICAL SPECIFICATIONS:

Light output:	5.260 lm	°K :	3000
Plum:	42,8W	CRI :	80
Efficacy:	122,9 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Type:	MID POWER LED	Gear:	Electronic
LED Lifetime:	50.000 L80 B10 (Ta=25°C)		
Power:	41W		


Light output tolerance +/- 10%

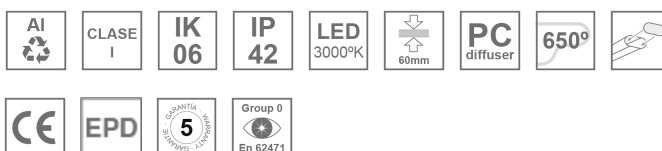

## CUSTOM MADE OPTIONS:



PHOTOMETRIC DATA :

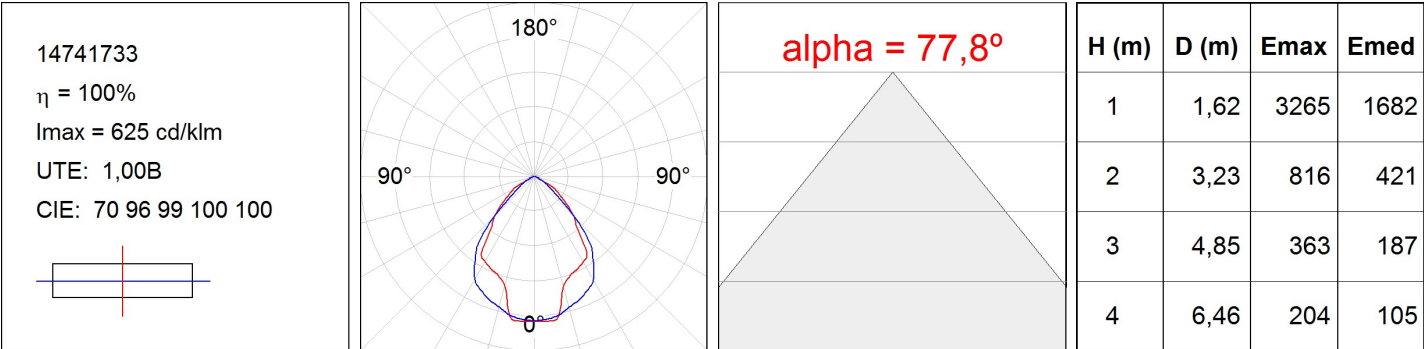


ACCESSORIES :

Assembly



**Product code:**  
ELWRST

**Description:**  
ACC. ELECTROSTATICS WRIST STRAP




**Product code:**  
F7COSUX/MMG  
F7COSUX/MMW

**Description:**  
FIL 70 ACC. COVER X/MM GR.  
FIL 70 ACC. COVER X/MM WH.



**Product code:**  
F7JO

**Description:**  
ACC. INTM JOINT




**Product code:**  
F7PRREX/MMG  
F7PRREX/MMW

**Description:**  
FIL 70 ACC. REC PROFILE X/MM GR.  
FIL 70 ACC. REC PROFILE X/MM WH.



**Product code:**  
F7REECG  
F7REECW

**Description:**  
FIL 70 ACC. REC END COVER GR.  
FIL 70 ACC. REC END COVER WH.



**Product code:**  
F7TEREHCG  
F7TEREHCW

**Description:**  
FIL 70 TECH ACC. REC 90° CORNER GR.  
FIL 70 TECH ACC. REC 90° CORNER WH.

