

HS2SF10MF830NW



HANCE G2 SUR 1000 WW MFL WH

Description:

LAMP surface multidirectional spotlight HANCE G2 SUR 1000. Allowing 355° rotation and tilting up to 90°. Body made of die-cast aluminium for proper thermal management. Black polycarbonate injection moulded anti-glare ring. 25° middle flood reflector. LED COB, 3000K y CRI80. Electronic ON OFF control gear included.IP20, IK07 ratings.Insulation Class I. LED life time: 78.000 L80B10 (Ta=25°C). Available finishes: Textured white and textured black.

Finish: Texturised white RAL 9010

Installation: Surface

TECHNICAL SPECIFICATIONS:

| Light output: | 1.022 lm | ⁰K : | 3000 |
|---------------|-------------------------|---------------|------------------|
| Plum: | 8,6W | CRI : | 80 |
| Efficacy: | 118,8 lm/w | R9 : | 60 |
| UGR: | <19 | MacAdam: | 3 |
| Туре: | СОВ | Power Supply: | 220-240V 50/60Hz |
| LED Lifetime: | 78.000 L80B10 (Ta=25°C) | Gear: | Electronic |
| Power: | 7W | | |

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:






HS2SF10MF830NW

HANCE G2 SUR 1000 WW MFL WH

PHOTOMETRIC DATA :

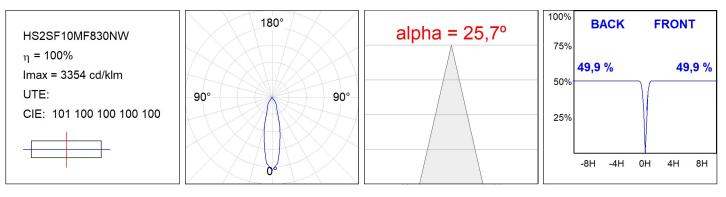

ACCESORIES :

Optical



Product code: HSCU50





Product code: HSHO50

Description: HANCE 1000/2000 ACC. HONEYCOMB GRILLE



Product code:

HSRI65C

Description: HANCE 1000/2000 ACC. RING DECO CO.



Product code: HSRI65M

Description: HANCE 1000/2000 ACC. RING DECO MET.



Product code: HSRI65W





Product code: HSSL50

Description: HANCE 1000/2000 ACC. SOFT LENS



Product code: HSTR50

Description: HANCE 1000/2000 ACC. DIF TRANS