


#### HS2SR30MF930NB



# HANCE G2 SEMIREC 3000 9WW MFL BK

#### **Description:**

LAMP semi-recessed multidirectional spotlight HANCE G2 SEMIREC 3000. Allowing 355° rotation and tilting up to 90°. Body made of die-cast aluminium for proper thermal management. Black polycarbonate injection moulded anti-glare ring. 25° middle flood reflector. LED COB, 3000K y CRI90. Electronic ON OFF control gear included. IP20, IK07 ratings. Insulation Class II. LED life time: 72.000 L80B10 (Ta=25°C). Available finishes: Textured white and textured black.



Finish: Texturised black RAL 9011

Installation: Semi-Recessed

#### **TECHNICAL SPECIFICATIONS:**

Light output:	2.864 lm	⁰K :	3000
Plum:	28,3W	CRI :	90
Efficacy:	101,2 lm/w	R9 :	61
UGR:	<19	MacAdam:	3
Туре:	СОВ	Power Supply:	220-240V 50/60Hz
LED Lifetime:	72.000 L80B10 (Ta=25°C)	Gear:	Electronic
Power:	25W		

#### Light output tolerance +/- 10%



## **CUSTOM MADE OPTIONS:**







HS2SR30MF930NB

HANCE G2 SEMIREC 3000 9WW MFL BK

# **PHOTOMETRIC DATA :**

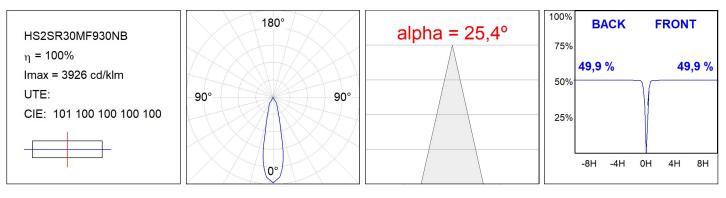

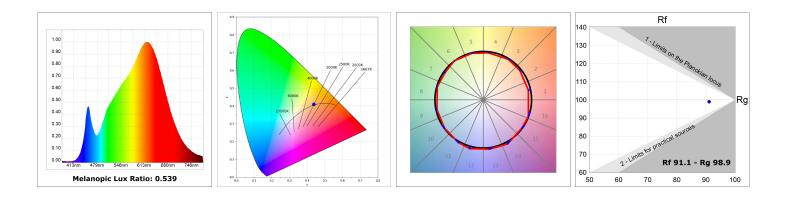



# ACCESORIES :

### Optical



Product code: HS2HO75

**Description:** HANCE G2 3000/4000 ACC. HONEYCOMB GRILLE HS2RI90C



Product code:

Description: HANCE G2 3000/4000 ACC. RING DECO CO.



Product code:

HS2RI90M

Description: HANCE G2 3000/4000 ACC. RING DECO MET.



Product code: HS2RI90W

Description: HANCE G2 3000/4000 ACC. RING DECO WH.



Product code: HS2TR75

Description: HANCE G2 3000/4000 ACC. DIF TRANS



Product code: HSSL50

Description: HANCE 1000/2000 ACC. SOFT LENS