

## KOMBIC 100 SURFACE


K11SF2040OP940DWW



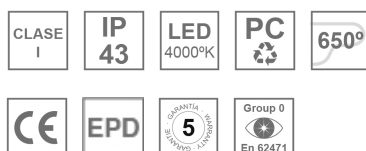
## KOMBIC 100 SF 2000 IP43 9NW OP DA WH/WH

**Description:**

Suspended or ceiling mounting downlight model KOMBIC 100 SF by Lamp brand. Body made of white aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. White interior reflector and optical film. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CRI90. Luminaire with electronic DALI wiring included. Insolation Class I. Lifetime: 50.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** Matte white RAL 9010**Weight:** 676 g**Installation:** Surface**TECHNICAL SPECIFICATIONS:**

|                      |                          |                      |                  |
|----------------------|--------------------------|----------------------|------------------|
| <b>Light output:</b> | 1.785 lm                 | <b>°K :</b>          | 4000             |
| <b>Plum:</b>         | 20,4W                    | <b>CRI :</b>         | 90               |
| <b>Efficacy:</b>     | 87,5 lm/w                | <b>R9 :</b>          | 65               |
| <b>Type:</b>         | COB                      | <b>MacAdam:</b>      | 3                |
| <b>LED Lifetime:</b> | 50.000 L80 B10 (Ta=25°C) | <b>Power Supply:</b> | 220-240V 50/60Hz |
| <b>Power:</b>        | 17W                      | <b>Gear:</b>         | Adjustable DALI  |

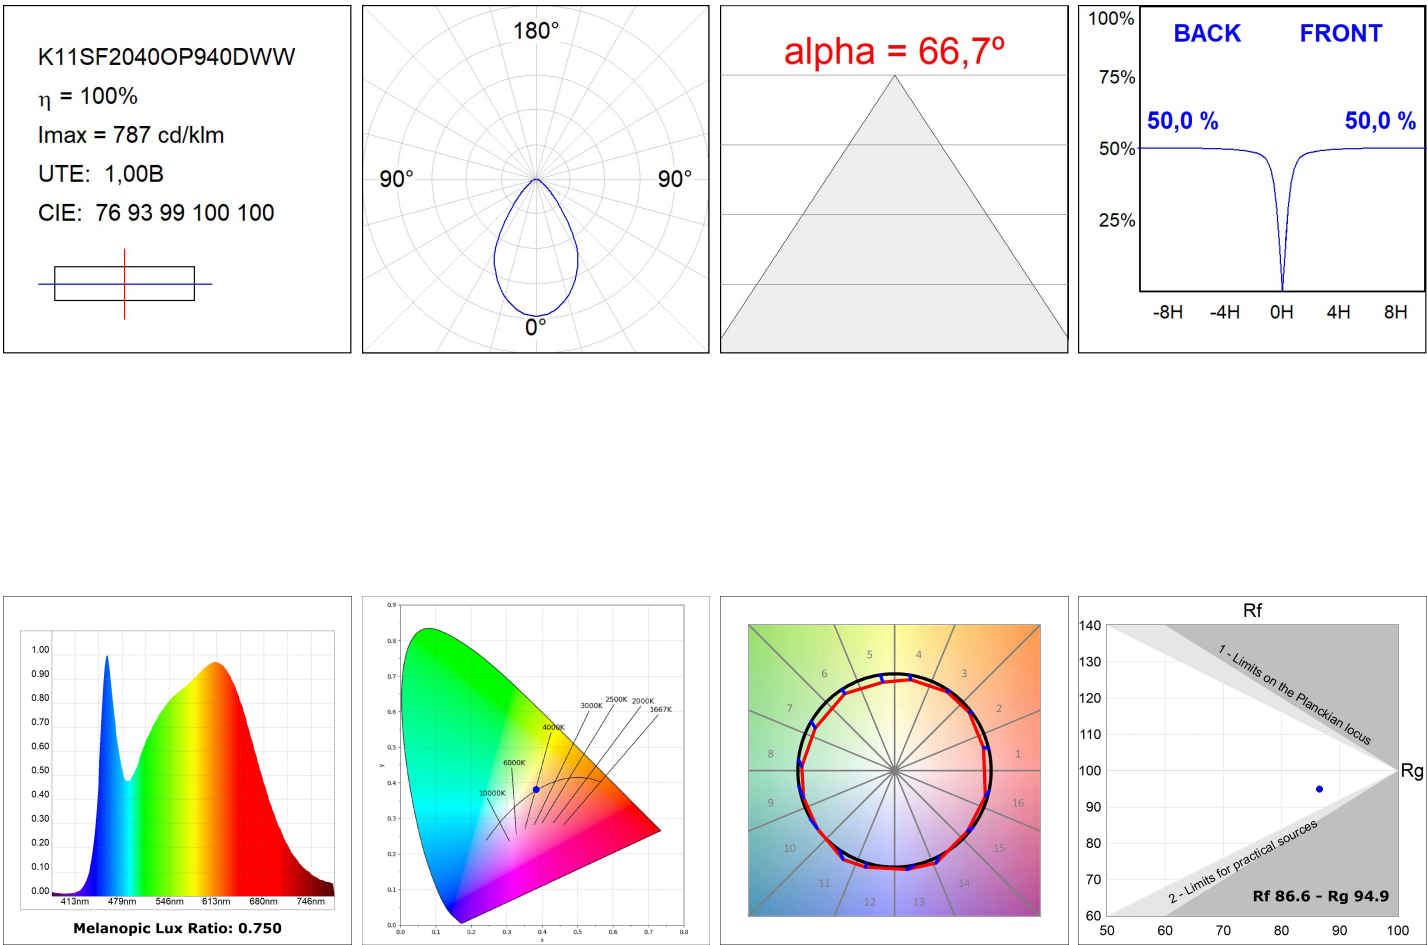
**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

KOMBIC 100 SURFACE

K11SF20400P940DWW

KOMBIC 100 SF 2000 IP43 9NW OP DA WH/WH

PHOTOMETRIC DATA :



KOMBIC 100 SURFACE

ACCESORIES :

Suspension



Product code:  
K11SUADLATBK

Description:  
KOMBIC 100 SF ADAPT. LATERAL CABLE BK



Product code:  
K11SUADLATWH

Description:  
KOMBIC 100 SF ADAPT. LATERAL CABLE WH