

KOMBIC 100 SURFACE

K11SF2040WF927DWW




KOMBIC 100 SF 2000 IP43 9VWW WFL DA W/W

Description:

Suspended or ceiling mounting downlight model KOMBIC 100 SF by Lamp brand. Body made of white aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. White interior reflector. Heatsink made of die-cast aluminium. COB LED, colour temperature 2700K with CRI90. Luminaire with electronic wiring Dali included. Insolation Class I. Lifetime: 50.000 L70 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low UGR<19. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010

Weight: 712 g




Installation: Surface

TECHNICAL SPECIFICATIONS:

Light output:	1.476 lm	°K :	2700
Plum:	20,3W	CRI :	90
Efficacy:	72,7 lm/w	R9 :	57
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	17W		

Light output tolerance +/- 10%

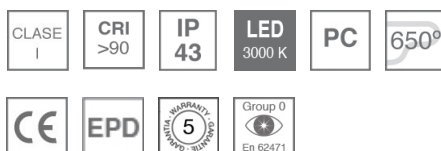

CUSTOM MADE OPTIONS:



KOMBIC 100 SURFACE

K11SF2040WF927DWW

KOMBIC 100 SF 2000 IP43 9VWW WFL DA W/W

PHOTOMETRIC DATA :

K11SF2040WF927DWW
 $\eta = 100\%$
 $I_{max} = 1265 \text{ cd/klm}$
 UTE: 1,00A
 CIE: 95 99 100 100 100

