

KOMBIC 150 DOWNLIGHT

K21RD2040WF830NMW



KOMBIC 150 RD 2100 IP43 WW WFL MA/WH

Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Matte metallic interior reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CR80. Luminaire with electronic wiring included. Insolation Class II. Lifetime: >100.000 L90 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low UGR<19. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

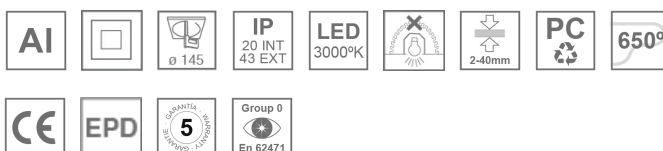
Finish: metalized polycarbonate mate

Weight: 704 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.282 lm	°K :	3000
Plum:	10W	CRI :	80
Efficacy:	128,2 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Type:	COB	Gear:	Electronic
LED Lifetime:	>100.000h L90 B10 (Ta=25°C)		
Power:	8,2W		

Light output tolerance +/- 10%


CUSTOM MADE OPTIONS:



KOMBIC 150 DOWNLIGHT

K21RD2040WF830NMW

KOMBIC 150 RD 2100 IP43 WW WFL MA/WH

PHOTOMETRIC DATA :

