


## KOMBIC 70 TRACK

K71TK1520RF840N66




## KOMBIC 70 TK 1500 IP20 840 RF FL SER

**Description:**

Downlight for mounting on three-phase track model KOMBIC 70 TK 1500. Body made of recycled aluminum extrusion with a rate of 75% and reflector made of recycled polycarbonate R-PC FR WHITE TM with bromine-free flame retardant. Flammability grade V0 according to UL94. Flood reflector for greater efficiency and control of light distribution and lower glare UGR<16. Heat sink made of aluminum injection. LED COB, with color temperature 4000K with CRI80. ON OFF electronic equipment included. With an IP20 protection rating. Insulation class II. Photobiological safety group 0. Lifespan: 72,000 L80 B10. Available finish SERENA palette (Arena, Bronze, Champagne, Dark Chocolate, Dark Grey, Terracotta). Tolerance of luminous flux  $\pm 4\%$  according to finish.

**Weight:** 560 g**Installation:** 3-Circuit track**TECHNICAL SPECIFICATIONS:**

<b>Plum:</b>	10,5W	<b>°K :</b>	4000
<b>UGR:</b>	19	<b>CRI :</b>	80
<b>Type:</b>	COB	<b>MacAdam:</b>	3
<b>LED Lifetime:</b>	72.000 L80 B10 (Ta=25°C)	<b>Power Supply:</b>	220-240V 50/60Hz
		<b>Gear:</b>	Electronic

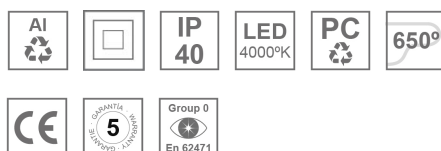**CUSTOM MADE OPTIONS:**