

OW1182ST830NG



OWL CL.II 17500 8WW GR.

**Description:**


Street luminaire model OWL CL. II 17500, LAMP brand. Body manufactured of texturised grey lacquered aluminum injection, with serigraphed tempered flat glass. Passive dissipation through the body. Model for HI-POWER LED, 3000K color temperature, CRI80 and control gear included and control gear included. With street optics. IP66, IK07 protection rating. Insulation class II. Its ball joint allows swiveling the light between 10° and -10°. Lifetime: 100. 000 L90 B10. BUG Rate: B2 U0 G2, ULOR 0%.

**Finish:** Texturised grey

**Weight:** 6.266 g

**Maximum surface exposed to wind:** 0.19 M2

**Installation:** Integrated in light-pole



**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	14.762 lm	<b>°K :</b>	3000
<b>Plum:</b>	135W	<b>CRI :</b>	80
<b>Efficacy:</b>	109,3 lm/w	<b>MacAdam:</b>	4
<b>Type:</b>	HIGH POWER LED	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	100.000 L90 B10 (Ta=25°C)	<b>Gear:</b>	Electronic
<b>Power:</b>	125W		

*Light output tolerance +/- 10%*





**CUSTOM MADE OPTIONS:**



PHOTOMETRIC DATA :

H (m)	D (m)	E <sub>max</sub>	E <sub>med</sub>
1	5,41	5745	613
2	10,81	1436	153
3	16,22	638	68
4	21,63	359	38

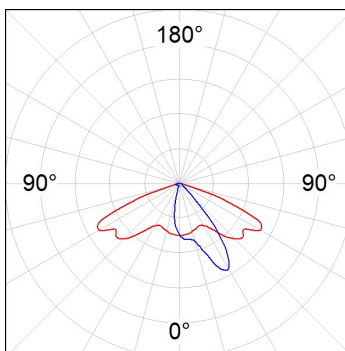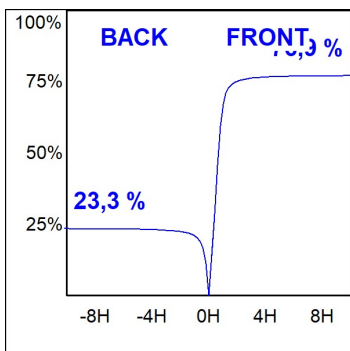

OW1182ST830NG  
 $\eta = 101\%$   
 $I_{max} = 856 \text{ cd/klm}$   
 UTE: 1,00E + 0,00T  
 CIE: 40 78 98 100 101

---

ACCESORIES :

Support



**Product code:**

OWAR1000G

**Description:**

OWL ACC.WALL ARM 1M GR.