


PLX212030PR4040DW



PLAT X2 1200X300 3400 NW PRIS IP40 DA WH

Description:

Recessed or suspended luminaire model PLAT X2, LAMP brand. Made of matt white steel with prismatic polycarbonate diffuser (PMMA). Model with MID-POWER LED, 4000K colour temperature and CRI 80. Control DALI gear included. Glare rating <19 (for 4h, 8h 70/50/20). With a protection rating of IP40 (non-recessed part) and IP20 (recessed part), IK03. Insulation class II. Photobiological safety group 0. Lifetime: 60.000h L80 B10


Finish: Matte Traffic white RAL 9016

Dimensions: 1.195 x 295 x 12,5 mm

Weight: 3.900 g

Installation: Recessed
TECHNICAL SPECIFICATIONS:

Light output:	3.300 lm	°K :	4000
Plum:	31,5W	CRI :	80
Efficacy:	104,8 lm/w	MacAdam:	3
UGR:	19	Power Supply:	220-240V 50/60Hz
Type:	MID POWER	Gear:	Adjustable DALI
LED Lifetime:	60.000 L80 B10		
Power:	27W		

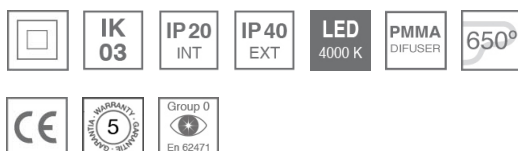Light output tolerance +/- 10%
**CUSTOM MADE OPTIONS:**

PHOTOMETRIC DATA :

