

TRACE 65

TC110H0165SY830NB



TRACE IP65 100 HOR 70 WW BK.


Description:

Outdoor wall-recessed luminaire model TRACE IP65 100 HOR 70 LAMP brand. Body made of injected aluminium and matt black serigraphed tempered glass. Model for MID-POWER LED with 3000K, CRI 80 colour temperature and control gear included. Texturised white lacquered aluminium symmetric reflector. IP65, IK07 protection rating. Insulation class I. Lifetime: 100.000 L90 B10. BUG Rate: B0 U2 G0, ULOR: 50%.

Finish: CATAPHORESIS

Dimensions: 115 x 114 x 145 mm

Weight: 672 g

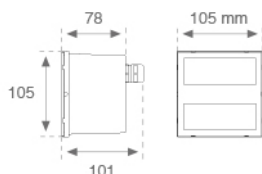

Installation: Wall recessed

Recessing measures: 107 x 112 x 135 mm

TECHNICAL SPECIFICATIONS:

Light output:	68 lm	°K :	3000
Plum:	2,7W	CRI :	80
Efficacy:	25 lm/w	MacAdam:	<3
Type:	MID POWER LED	Power Supply:	100-240V 50/60Hz
LED Lifetime:	100.000 L90 B10 (Ta=25°C)	Gear:	Electronic
Power:	1.5W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:


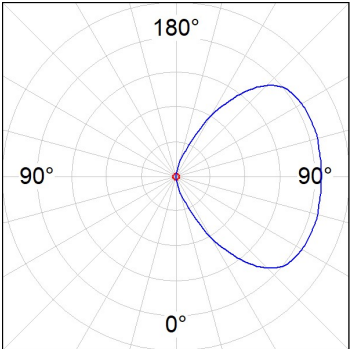



TRACE 65

TC110H0165SY830NB

TRACE IP65 100 HOR 70 WW BK.

PHOTOMETRIC DATA :

<div>5641502</div> <div>η = 100%</div> <div>Imax = 337 cd/klm</div> <div>UTE: 0,50T</div> <div>CIE: 12 39 70 50 100</div> <div></div>		<div>alpha = 600,0°</div> <div></div>	H (m)	D (m)	E _{max}	E _{med}
			1	0,00	-1	NAN
			2	0,00	0	NAN
			3	0,00	0	NAN
			4	0,00	0	NAN

ACCESORIES :

Assembly



Product code:

TCREBO65100

Description:

TRACE IP65 ACC. 100 REC BOX